

DirectTex® Poplin Plus

Fields of application

.02 .04 .05 .07

Specifications

	REF. 599200 129
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 252/ 320/ 505 cm ca. 99/ 126/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 175 g/m ² ca. 5.2 oz/yd ²
	ca. 0.39 mm ca. 390 µm
	rolls 50/ 100 m 55/ 109 yd
	cold, heat, ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4-0,5 %	1,5 %	
190°C	/ %	/ %	
200°C	/ %	/ %	•
210°C	0,8-1,0 %	4,1 %	


Certifications



DirectTex® Poplin Plus

Fields of application

.02 .04 .05 .07

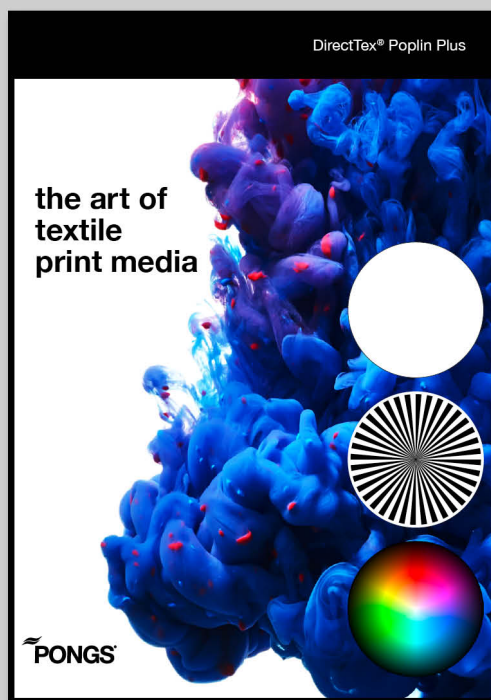

Ref.-Nr.: 599200 129 | Preview print sample