

DirectTex® Flag Supreme

Fields of application

.02 .04 .05 .06 .07

Specifications

REF.	599096 141
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 160/ 252/ 320/ 505 cm ca. 63/ 99/ 126/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1
	ca. 90 g/m² ca. 2.65 oz/yd²
	ca. 0.28 mm ca. 280 µm
	rolls 100 m 109 yd
	blank: 55.8 % DIN EN 410
	length: 395.8 N (15.4 N) cross: 425.2 N (15.3 N) DIN EN ISO 13934-1 (13934-2)
	length: 23.5 % cross: 64.2 % DIN EN ISO 13934-1
	length: 0.7 % cross: 12.4 % DIN EN 14704-1
	cold, heat, ultrasonic cut
Specs	UV stable

Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4 %	1,2 %	•
190°C	0,5 %	1,2 %	
200°C	0,6 %	1,2 %	
210°C	0,7 %	1,5 %	


Certifications



DirectTex® Flag Supreme

Fields of application

.02 .04 .05 .06 .07

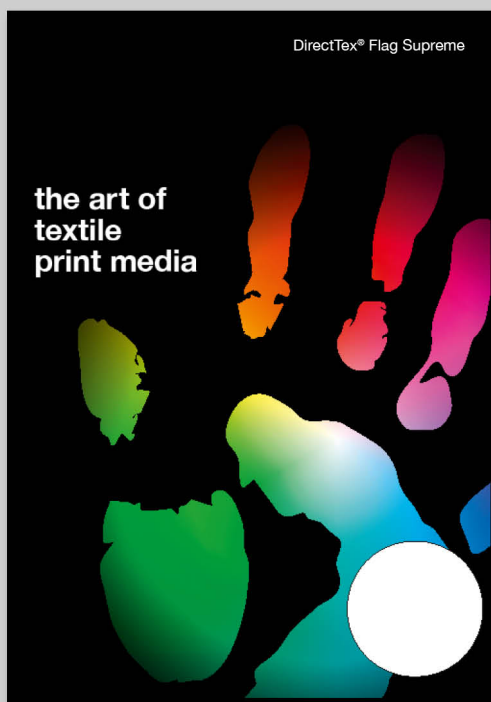

Ref.-Nr.: 599096 141 | Preview print sample