

DirectTex® Spinnaker Economy

Fields of application

.02 .04 .06 .07

Specifications

REF.	501065 119
	100 % polyester weave fabrics PVC-free, recyclable
	ca. 155/ 310 /505 cm ca. 61/ 122/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 65 g/m ² ca. 1.9 oz/yd ²
	ca. 0.13 mm ca. 130 µm
	rolls 50/ 100 m 55/ 109 yd
	blank: 5 DIN EN ISO 105-B02
	100 Pa: 73 l/(m ² s) 200 Pa: 125 l/(m ² s) DIN EN ISO 9237
	length: 582 N (18.5 N) cross: 652 N (21.7 N) DIN EN ISO 13934-1 (13937-2)
	length: 25.0 % cross: 33.1 % DIN EN ISO 13934-1
	heat, ultrasonic cut
Specs	UV stable

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	•
Outside	•	•	•

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	1,7 %	2,6 %	•
190°C	1,3 %	3,3 %	
200°C	1,3 %	4,8 %	
210°C	1,4 %	6,5 %	

Certifications



Certified for
HP Latex Inks






DirectTex® Spinnaker Economy

Fields of application

.02 .04 .06 .07

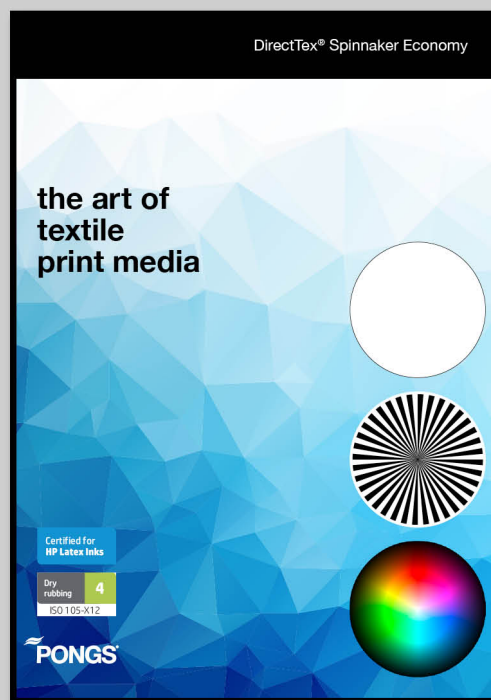

Ref.-Nr.: 501065 119 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltruff
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/06