

DirectTex® Backlite Premium

Fields of application

.01 .02 .04 .05 .07

Specifications

	599280 139
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 252/ 505 cm ca. 99/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 Class A ASTM E48-16 NFPA 701 California Title 19
	ca. 260 g/m ² ca. 7.7 oz/yd ²
	ca. 0.5 mm ca. 500 µm
	rolls 50 m 55 yd
	blank: 15.1 % DIN EN 410
	blank: 6 DIN EN ISO 105-B02
	cold, ultrasonic cut
	direct light

Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4 %	0,7 %	•
190°C	0,6 %	1,2 %	
200°C	0,8 %	1,4 %	
210°C	1,3 %	2,0 %	


Certifications



DirectTex® Backlite Premium

Fields of application

.01 .02 .04 .05 .07

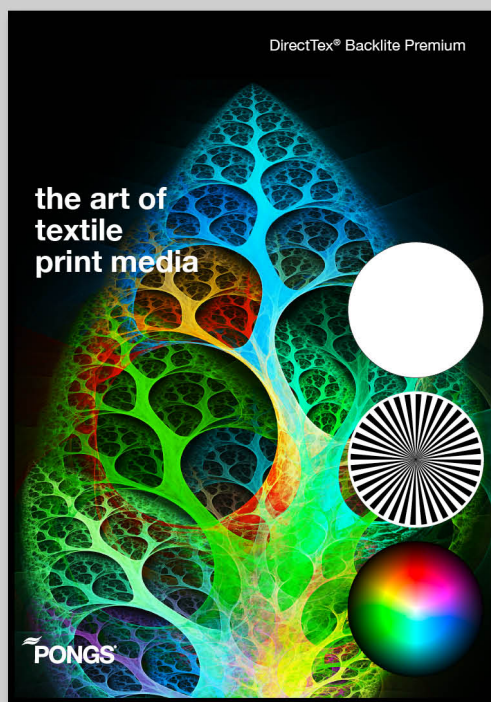

Ref.-Nr.: 599280 139 | Preview print sample