

DirectTex® Softimage Satori

Fields of application

.01 .02 .04 .05 .07

Specifications

	REF. 599235 193
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 160/ 252 /320 cm ca. 63/ 99/ 126 inch other widths available on request
	B-s1, d0 DIN EN 13501-1
	ca. 250 g/m ² ca. 7.4 oz/yd ²
	ca. 0.52 mm ca. 520 µm
	rolls 100 m 109 yd
	cold, ultrasonic cut
	direct light

Printing methods

print	UV	Latex	Dyesub
Inside			•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4 %	1,9 %	
190°C	0,4 %	2,3 %	•
200°C	0,5 %	3,3 %	
210°C	0,6 %	3,8 %	

Certifications




* in testing

DirectTex® Softimage Satori

Fields of application

.01.02 .04 .05 .07

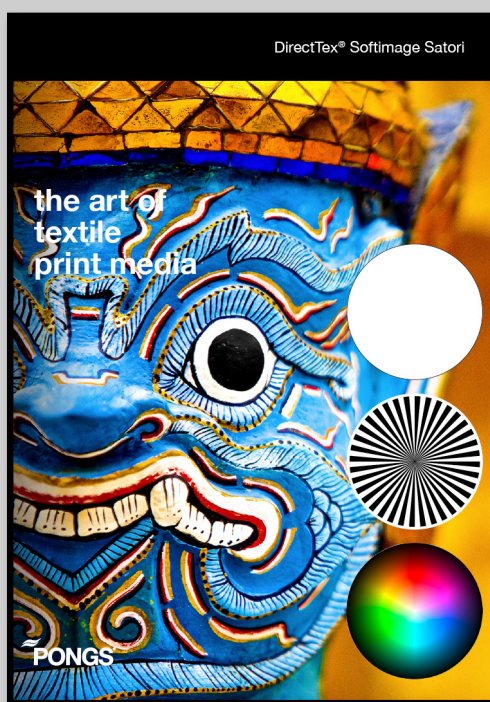

Ref.-Nr.: 599235 193 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltruff
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/11