

PrintTex®

Artist Mambo®

Fields of application

.02 .04 .05 .07

Specifications

	564160 237
	100 % polyester weave fabrics PVC-free, recyclable
	ca. 160/ 252/ 320/ 505 cm ca. 63/ 99/ 126/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1
	ca. 170 g/m ² ca. 5.0 oz/yd ²
	ca. 0.30 mm ca. 300 µm
	rolls 50/ 100 m 55/ 109 yd
	blank: 28.1 % DIN EN 410
	blank: 3.9 % DIN EN 410
	coated side: 7-8 uncoated side: 6 DIN EN ISO 105-B02
	blank: 96.35 DIN 5033-1
	cold, ultrasonic cut

	warp: 1317 N weft: 1353 N DIN EN ISO 13934-1
	warp: 31.3 % weft: 31.6 % DIN EN ISO 13934-1
	warp: 0.8 % weft: 1.2 % DIN EN 14704-1
	direct light

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			•

Certifications






PrintTex® Artist Mambo

Fields of application

.02 .04 .05 .07

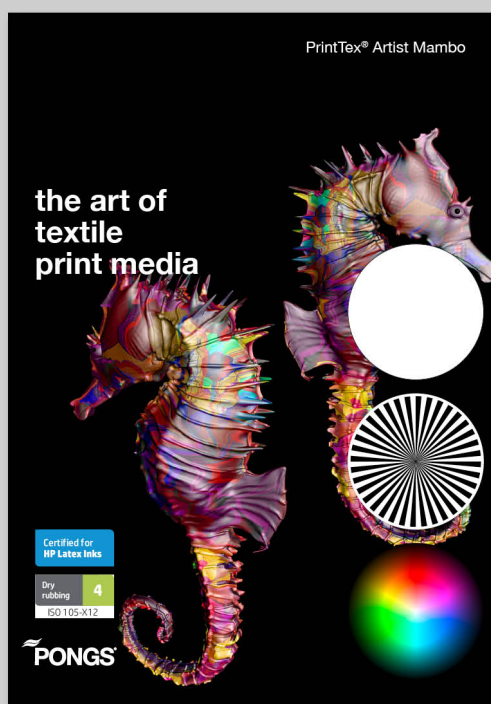

Ref.-Nr.: 564160 237 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltröf
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/06