

# PrintTex® SUNTEX® II

Fields of application

**.02 .05 .07 .08**

## Specifications

|                                                                                     |                                                                                |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | 550321 094                                                                     |
|    | 100 % Trevira CS<br>weave fabrics<br>PVC-free, recyclable                      |
|   | 505 cm<br>199 inch<br>other widths available on request                        |
|  | ca. 342 g/m <sup>2</sup><br>ca. 10.1 oz/yd <sup>2</sup>                        |
|  | ca. 0.4 mm<br>ca. 400 µm                                                       |
|  | rolls<br>50 m<br>55 yd                                                         |
|  | blank: 6-7<br>DIN EN ISO 105-B02                                               |
|  | blank: 23.5 %<br>DIN EN 410                                                    |
|  | blank: 1.1 %<br>DIN EN 410                                                     |
|  | blank: 93.13<br>DIN 5033-1                                                     |
|  | trapezoid tear resistance<br>warp: 1122.5 N weft: 169.5 N<br>DIN EN ISO 9073-4 |
|  | maximum tensile strength<br>warp: 3586.0 N weft: 853.6 N<br>DIN EN ISO 13934-1 |
|  | maximum tensile elongation<br>warp: 59.4 % weft: 35.8 %<br>DIN EN ISO 13934-1  |
|  | heat, ultrasonic cut                                                           |

water repellency  
blank: 5  
DIN EN ISO 4920

water absorption  
blank: 16.7 %  
DIN EN 29865 (Bundesmann)

lotus effect (after 10 min)  
blank: 1-2  
DIN EN 29865 (Bundesmann)

water throughput  
blank: 96.3 ml  
DIN EN 29865 (Bundesmann)

oil repellent properties  
blank: 6  
AATCC 118-1997

resistance to water  
blank: 10.2 mbar  
DIN EN 20811

## Printing methods

| print   | UV | Latex | Dyesub |
|---------|----|-------|--------|
| Inside  | •  |       |        |
| Outside | •  |       |        |

## Certifications




UV Standard 801  
17.1.10.0141-80-1



## PrintTex® SUNTEX® II

Fields of application

**.02 .05 .07 .08**

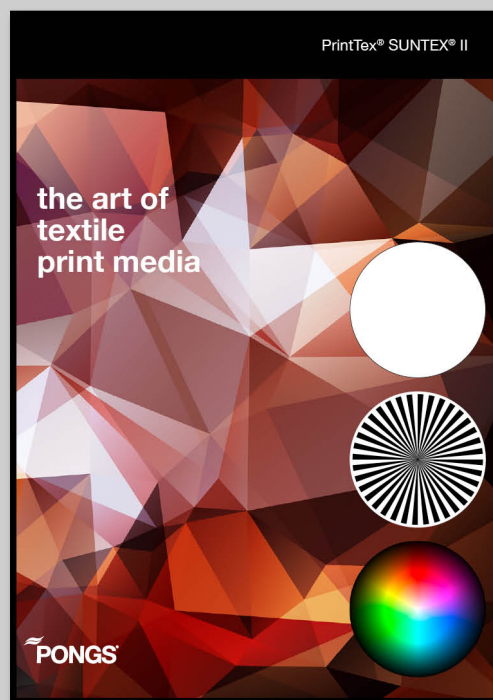

Ref.-Nr.: 550321 094 | Preview print sample