

PrintTex®

SILENCIO® Size 5

Fields of application

.01 .02 .04 .05 .06 .07 .08 .11 .12

Specifications

	687300 003
	100 % Trevira CS weave fabrics PVC-free, recyclable
	ca. 155/ 252/ 310/ 505 cm ca. 61/ 99/ 122/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 M1 NF P 92 503 - 507
	Class A ASTM E84-16 NFPA 701
	ca. 300 g/m ² ca. 8.8 oz/yd ²
	ca. 1.4 mm ca. 1400 µm
	rolls 25 m 27 yd
	warp: 1794.2 N weft: 1207.5 N DIN EN ISO 1421
	warp: 41.4 % weft: 22.8 % DIN EN ISO 1421
	warp: 0.4 % weft: 0.3 % DIN EN 14704-1
	cold, ultrasonic cut

Printing methods


print	UV	Latex	Dyesub
Inside	•	•	
Outside	•	•	

Certifications



Acoustic absorption value α_w /class*: 0.85/ B

Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 2 x 20 mm ISOVER SSP 2 and 10 mm airspace.

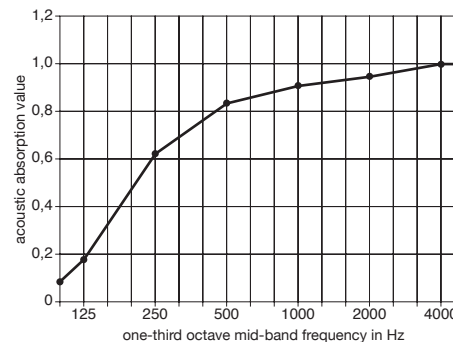



PrintTex® SILENCIO® Size 5

Fields of application

.01 .02 .04 .05 .06 .07 .08 .11 .12



Ref.-Nr.: 687300 003 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltröf
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/06